

T-3 Bluetooth Gamepad


Instructions :

- 1.The product is mainly compatible with the Andriod/iOS/Win 7/8/10 and PS3 system games.
- 2.Applicable Device :Smartphone/Tablet/ Smart TV ,Android TV Box /PC /PS3/SWITCH(with cable).
- 3.LT/RT is an analog function, paying more attention to the details of the experience, playing the game precise and controllable.
- 4.Receiver is requested when playing game on PC/PS3.
- 5.Use the wireless receiver directly into the USB port.

※Some games may not be directly connected to this product due to irresistible factors such as official systems, games, game platform upgrades or changes.Our company does not take any responsibility. Our company reserves the right of final interpretation.

Controller overview:

- LED1 = Android V3Mode
- LED2 = IphoneV3 Mode
- LED3 = Charing Idicator
- LED4 = Game center Mode

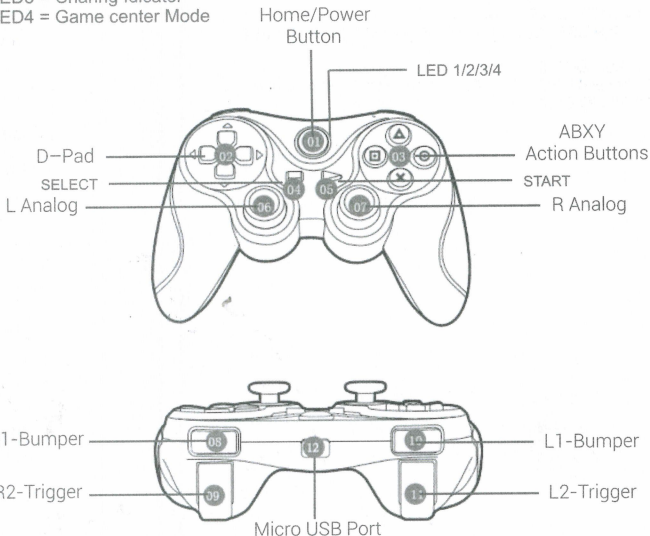

CONNECTING ON ANDROID PHONES

Connecting On Android Devices :

The Android devices can be connected to controller via Bluetooth connection as follow:

How to Pair

1. When in OFF mode press and hold A button and HOME button together 2 seconds till LED1 light start flashing rapidly. The Gamepad is pairing Mode.
 2. Search for devices on your Android Bluetooth settings .
 3. Connect to T-3 .
 4. LED1 will stay ON after connecting successful
 5. Use the ShootingPlus V3 App tool to map key positions to play non-default screen devices and more games .
- A. Download The ShootingPlus V3 APP ,Scan the QR code or search on Google Play Store



- B. Instructions of mapping the buttons of controller with ShootingPlus V3 APP on Android Device
- (a). Bluetooth is connected well, Download ShootingPlus V3 APP and to install.
 - (b). After launching the game directly, click the "V3" floating ball icon on the screen.
 - (c). Start the game press the "START" button on the controller to enter the App's key-changing interface.
 - (d). Drag the key icon in the Key-changing interface to map operating position on the game.
(Click the key icon to select the key attribute)
 - (e). Click "Save" on the menu bar, then "confirm" to save
 - (f). Click "Close" on the menu bar or press the "START" button again (or click the "V3" floating ball icon again) to exit the Key-changing interface.
 - (g). In the game, you can press the "SELECT" button on the controller to call up the set key prompts
- C. After installing the ShootingPlus V3 App, you can also download the set game keys directly in the "Cloud Key List" of the App main interface.
- D. Play special games directly without key setting like as Glory of Kings /PUBG Mobile/Mobile Legends/ Knives Out(Except for the game itself change rules)
- (a). Press UP button and HOME button together to play Glory of kings
 - (b). Press RIGHT Button and HOME button together to play PUBG Mobile
 - (c). Press DOWN button and HOME button together to play Mobile Legends
 - (d). Press LEFT button and HOME button together to play Knives Out
6. For MTK mobile ,please press X button+HOME button to enter the standard Android mode of gaming center(ex:PUTAO Gaming Center,Game Housekeeper,Octopus)

Note: If you enter the wrong mode, please cancel the Bluetooth pairing and then re-pair into Android mode

CONNECTING ON IOS PHONES

Connecting on iOS Devices:

1. When in OFF mode press and hold Y button and HOME button together 2 seconds till LED2 light start flashing rapidly. The Gamepad is pairing Mode.
2. Search for devices on your iPhone Bluetooth settings.
3. Connect to T-3
4. LED2 will stay ON after connecting successful
5. Support for iOS mobile device 11.3 to 12.1.4 system
6. Use the ShootingPlus V3 App tool to map key positions to play non-default screen devices and more games

A. Download The ShootingPlus V3 APP Scan the QR code or search on APP Store



B. Instructions of mapping the buttons of controller with ShootingPlus V3 APP on iOS Device

- (a). Bluetooth is connected well, Download ShootingPlus V3 APP and to install
- (b). After launching the game directly, take a screenshot of the game in the game (for iPhone X/MAX press "power" and "Volume +key" together. Other iPhones press "power" and "HOME" together).
- (c). Open ShootingPlus V3 App, click the "V3" floating ball icon on the screen or press the "START" button on the controller to enter the App's key-changing interface.
- (d). Long press the blank space on the screen to start loading the game screenshot. Click to select the picture and select the game screenshot (b. Screenshot of the operation).
(In the process of selecting a picture, there will be access to the album reminder, please allow access, i.e. click OK)
- (e). Drag the key icon in the changed interface to map operating position on the game. (Click the key icon to select the key attribute)
- (f). Click "Save" on the menu bar, then "confirm" to save
- (g). Click "Close" on the menu bar or press the "START" button again to exit the change button interface.
- (h). Restart the game to play with controller.

C. After installing the ShootingPlus V3 App, you can also download the set game keys directly in the "Cloud Key List" of the app's main interface.

D. Play special games directly without key setting like as Glory of Kings /PUBG Mobile/Mobile Legends/ Knives Out (Except for the game itself change rules)

- (a). Press UP button and HOME button together to play Glory of Kings
- (b). Press RIGHT Button and HOME button together to play PUBG Mobile
- (c). Press DOWN button and HOME button together to play Mobile Legends
- (d). Press LEFT button and HOME button together to play Knives Out

Note: If you enter the wrong mode, please cancel the Bluetooth pairing and then re-pair into iOS mode

CONNECTING ON OTHER DEVICE

ShootingPlus V3 App ,For more details, please pay attention to the WeChat public account



Instruction to connect to PC device / smart TV / TV box / PS3 :

1. Plug the 2.4G wireless receiver into the USB interface of the PC device/smart TV/TV box;
2. When in OFF mode , pressing the L1 key + HOME key together, the controller enters the wireless pairing mode. At this time, the LED1 and LED2 indicators flash rapidly;
3. When connected, the LED1 and LED2 indicators will stay ON;
4. you can play games downloaded from the PC device / smart TV / TV box / PS3

Turbo function:

1. Turbo function setting: first press and hold the function key to be accelerated, for example: A key, then press and hold Turbo key, then A key has acceleration continuous function;
2. Turbo function cancel: first press and hold the function key that has been set to accelerate, such as A key, then press and hold the Clear key. At this time, the acceleration interlock function of A key is canceled.

Wired USB mode operation and precautions:

1. With the controller off,hold the R1 key and insert the USB cable, it will automatically recognize the device (PC/PS3/SWITCH);
2. The LED in the corresponding mode flashes quickly after the USB is inserted, and the LED in the corresponding mode is always on after the USB recognition is successful;
3. In PS3 and SWITCH host mode, the indicator light after USB recognition is successful will be automatically assigned according to the channel issued by the host (1,2,3,4 channels correspond to LED1, LED2, LED3, LED4)

Controller charging / sleep / wake up function:

1. When the controller is in the off state (press the HOME button to turn on/off), the LED4 indicator flashes slowly and is always on after charging. When charging in the Bluetooth connection state, the LED4 indicator light flashes slowly, and it lights up after being fully charged.
2. Sleep/Wake-up function: The gamepad will go to sleep if it is not used within 5 minutes. When you need to use it again, you need to press HOME button to wake up and you can connect back;
3. When the battery is low, the LED4 indicator flashes quickly.

INSTRUCTIONAL MANUAL FORM

Operational mode :

Bluetooth mode:

OS	Android		iOS	
Working mode	Android V3 Game mode	Android standard game mode	Ios V3 game mode	ios game center mode
Mode paring Long press 2 s	A +HOME	X+HOME	Y+HOME	X+HOME
Indicator	LED1	LED4	LED2	LED4
Remark	Play Android Market Download games	Play gaming center games	Play App store download games	Play Gaming center games

2.4G wireless mode:

OS	Windows	Ps3	Switch
Working Mode	2.4G wireless mode	2.4G wireless mode	2.4G wireless mode
Mode paring Long press 2 s	L1+HOME	L1+HOME	L1+HOME
Indicator	LED1+LED2	LED1+LED2	LED1+LED2
Remark	A wireless receiver is required. Power-on default to X-Input 360 mode, Press SELECT + START button for 2 seconds to switch to D-Input mode	Wireless receiver is required	Wireless receiver is required

Wired mode:

OS	Windows	Ps3	Switch
Working Mode	USB Cable		
Mode paring	Hold the R1 and plug the cable into USB port		
Indicator	Automatic Detection and assigning a LED		
Remark	Power-on default to X-Input 360 mode, Press SELECT + START button for 2 seconds to switch to D-Input mode		

TECHNICAL FEATURE

Electrical parameters:

- | | |
|--------------------------------------|--|
| 1. Working voltage: DC3.7V | 5. Charging voltage/current: DC5V/500mA |
| 2. working current: 8mA | 6. Bluetooth transmission distance: $\leq 8M$ |
| 3. Working time: 20H | 7. Battery capacity: 380mAh |
| 4. Sleeping mode current: $<10\mu A$ | 8. standby time: full power placed for 30 days |

Precautions:

1. Please do not store this product in a humid or hot place;
2. Do not knock, beat, hit, pierce, or attempt to disassemble the product to avoid unnecessary damage to the product;
- 3, the product built-in battery, do not discard with the garbage;
4. Do not charge the handle near fire or other heat sources;
5. Non-professionals should not disassemble this product, otherwise it will not be included in the after-sales warranty service.

Common problem:

Q: Can't I find the handle when I open the phone?

A: Undo the Bluetooth pairing device name before the handle and the phone, and turn on the phone Bluetooth search pair again.

Q: Why doesn't the new handle turn on?

A: The new handle is generally low in power. Please use the USB cable inside the box to connect the 5V charger to charge the handle.

After fully charging, press the power button to turn it on.